EBE Series R-410A Evaporators

The New Standard In Marine High-Performance Evaporators



Compact EBE split evaporators for boats are draw-through, ductable cooling units with reversecycle heating. Featuring a rotatable, high-efficiency permanent split capacitor (PSC) blower in which the motor is concealed, EBE series evaporators are available in capacities from 6K to 36K BTU/hr. EBHE units have electric heat.

The EBE Series was designed for installation low in a closet, cabinet, or other enclosed space, with discharge air ducted to one or more grilles high in the cabin. EBE units can be used with a combination of plenums and flexible duct, or built-in ductwork may be used. If you are using built-in ductwork, a flexible transition between the blower and duct should be installed.

Vibration-isolation mounting is built into each EBE unit to reduce noise and vibration. The PSC blower is supported by a sturdy aluminum bracket with isolation grommets to reduce possible vibration. The blower's internal motor housing reduces the overall unit depth for easier installation and promotes quieter operation.

The drain pan and blower housing are covered with insulating foam which reduces noise and secondary condensation.

The "positive flow" drain pan has an anti-slosh, antifungal foam lining. Two 1/2 in. (13 mm) drains are located on the blower side of the drain pan.

Key Benefits

- Compact ductable cooling or heating units
- High-velocity (HV) fully-insulated blowers are rotatable

104 Greet

- Insulated condensate pan with anti-slosh, anti-fungal foam lining
- Available with electric heat (EBHE models)
- High-efficiency evaporator coil
- Larger blower inlet for increased air flow across the coil
- Blower support bracket with cushioned mounts to reduce noise and vibration
- Increased metal thickness on structural parts for added strength
- Thermal expansion valve for optimal performance over a range of conditions
- Designed to be used with Emerald Series (R-410A) condensers




Specifications for EBE Series R-410A Evaporators

| Model ⁽¹⁾ | EBE18 | EBE24 | EBE30 | EBE36 | EBHE8 | EBHE10 | EBHE12 | EBHE16 | EBHE24 |
|---|-----------|------------|-----------|-----------|-----------|-----------|-----------|-----------|------------|
| Capacity (BTU/h) | 18000 | 24000 | 30000 | 36000 | 8000 | 10000 | 12000 | 16000 | 24000 |
| Voltage @ 50/60Hz 1-Ph (V) | 230 | 230 | 230 | 230 | 230 | 230 | 230 | 230 | 230 |
| Full Load Amps (FLA) Cool (A) | 1.15 | 1.64 | 1.64 | 7.3 | 0.98 | 0.66 | 0.56 | 0.88 | 1.64 |
| Full Load Amps (FLA) Heat (A) | N/A | N/A | N/A | N/A | 5.4 | 7.2 | 9.26 | 9.58 | 14.68 |
| Full Load Amps (FLA) Blower (A) | 1.15 | 1.64 | 4 | 4 | 0.98 | 0.66 | 0.56 | 1.15 | 1.64 |
| Max. Circuit Breaker (A) | 5 | 5 | 5 | 10 | 10 | 10 | 10 | 10 | 20 |
| Min. Circuit Ampacity (A) | 2 | 3 | 3 | 10 | 6 | 8 | 10 | 10 | 16 |
| Electric Heat (kW/hp) | N/A | N/A | N/A | N/A | 1/1.4 | 1.5/2.1 | 2/2.7 | 2/2.7 | 3/4.1 |
| Heater Amps (A) | N/A | N/A | N/A | N/A | 4.35 | 6.52 | 8.7 | 8.7 | 13.04 |
| Air Flow (cfm/m3h) | 540/918 | 800/1360 | 1000/1700 | 1200/2039 | 266/452 | 333/566 | 400/680 | 533/906 | 800/1360 |
| Height-Coil (in/mm) ⁽²⁾ | 13.63/347 | 16.5/420 | 20.5/521 | 20.5/521 | 11.25/286 | 12.5/318 | 12.5/318 | 13.5/343 | 16.5/420 |
| Height-Blower (in/mm) ⁽²⁾ | 15.13/385 | 17/432 | 22/559 | 22.25/566 | 12.5/318 | 13.5/343 | 13.5/343 | 15.5/394 | 17/432 |
| Width (in/mm) (2) | 16/407 | 20/508 | 20.75/528 | 20.75/528 | 13.75/350 | 14.25/362 | 14.25/362 | 16/407 | 20/508 |
| Depth (in/mm) (2) | 14/356 | 14.5/369 | 15/381 | 17.75/451 | 12/305 | 13.75/350 | 14.5/369 | 14.75/375 | 15/381 |
| Min. Supply Duct Size (in/mm) | 7/178 | 9/229 | 10/254 | 10/254 | 6/152 | 6/152 | 6/152 | 7/178 | 9/229 |
| Min. Supply Air Grille Size (sq in/sq cm) | 100/645 | 140/903 | 170/1097 | 196/1265 | 49/316 | 60/387 | 70/452 | 80/516 | 140/903 |
| Min. Return Air Grille Size (sq in/sq cm) | 200/1290 | 240/1548 | 350/2258 | 360/2323 | 98/632 | 100/645 | 130/839 | 160/1032 | 240/1548 |
| Net Weight (lbs/kg) ⁽³⁾ | 27/12.3 | 37.65/17.1 | 36/16.4 | 41.75/19 | 21/9.6 | 23/10.5 | 23/10.5 | 28/12.8 | 44.75/20.3 |
| Gross Weight (lbs/kg) ⁽³⁾ | 35/15.9 | 49.5/22.5 | 42/19.1 | 56.5/25.7 | 29/13.2 | 31/14.1 | 31.5/14.3 | 36/16.4 | 56.25/25.6 |

¹ 'EBE' indicates evaporator without electric heat; 'EBHE' indicates evaporator with electric heat. Dometic Marine also offers an EBHE6-1KW and EBHE16-3KW. For more information please contact a sales representative at 954-973-2477. ² All dimensions ± 0.30 in. (8 mm).

² All dimensions ± 0.30 i
³ All weights ± 10%

Dimensions

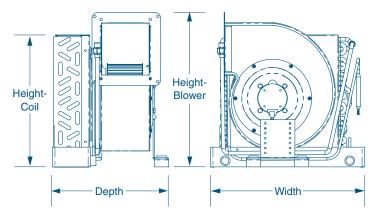

DOMETIC MARINE DIVISION

2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414 www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA: 8:00 AM to 5:00 PM Eastern Time: 800-542-2477

After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES Europe & the Middle East: Call +44(0)870-330-6101

For all other areas visit our website to find your nearest distributor.

